

Kitchen Faucet Installation Manual

W-357(ES)

Warranty Duration

All components of this faucet system are covered under a lifetime limited warranty, ensuring they are free from defects in material and workmanship for the original purchaser.

Repair and Replacement

If the product shows defects in material or workmanship under normal use and within the warranty period, we will, at our discretion, either repair the product or provide a replacement at no cost to the original purchaser. Please note that proof of purchase (e.g., an invoice) is required when requesting service. The warranty does not cover damages caused by improper installation, misuse, or modifications.

Exclusions

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantling after installation.
- Damage resulting from abnormal water pressure or impurities in water pipes, which is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance, which is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, lightning storms, etc., which is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

Having Trouble?Contact us.

✉ Email: info@faucetsupport.com

☎ Toll Free: 1-888-969-6880



**M3060
SFS-1350K**

CONTENT




Installation Instructions for Kitchen Faucet ----- (1-3)

CONTENIDO

Instrucciones de instalación para grifo de cocina ----- (4-6)

♦ Installation and Maintenance Instructions

1. Check the accessories list to verify that all parts are complete in this package.
2. Do not disassemble the main body by yourself.
3. Connect inlet pipes to supply valves.
4. Make sure inlet pipes and supply valves have no impurities and are cleaned, with no impurities in the pipeline.
5. After installation, check all joints for leakages.
6. Do not leave the kitchen faucet exposed to a severely corrosive environment.






Do's

1. In order to keep the mixer surface bright, please clean the mixer regularly.
2. Rinse the faucet with clean water and wipe it with a soft cotton cloth.
3. Use one of the following cleaners to remove dirt from the surface:
 - a. Mild liquid cleaner.
 - b. Colorless glass cleaner and powder cleaner that do not cause abrasion and can be dissolved completely.
 - c. Polish liquid that does not cause abrasion.


Don'ts

1. Avoid using cleaning powder, harsh cleaning chemicals, brushes and coarse cloth to prevent scratching and friction.
2. Do not use acid cleaners to clean the faucet as they may cause surface corrosion of the faucet. If the faucet is exposed to harmful acid substances, please rinse it immediately with water.

Tools Needed:




◆ **Hot and Cold Kitchen Faucet Accessories List**

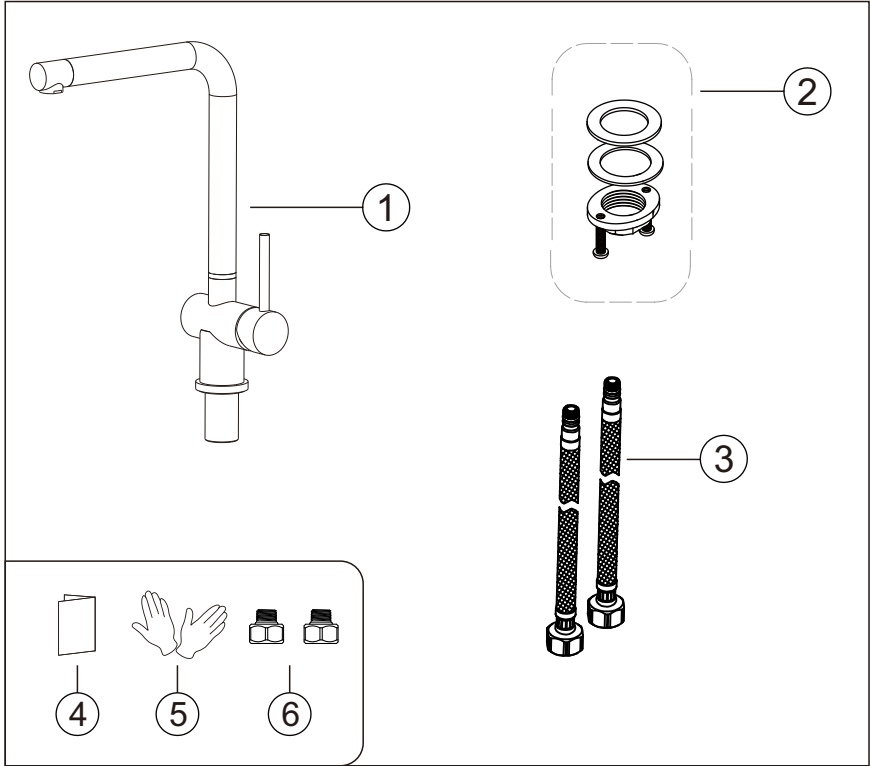

NO.	Part Name	Qty
1	Faucet Body	1
2	Tailpiece Nut Assembly	1 set
3	Hot and Cold Inlet Pipes	1 pair
4	Installation Manual	1
5	Gloves	1 pair
6	Hose Adapter Change G9/16 to G1/2	2


◆ Installation Step

1

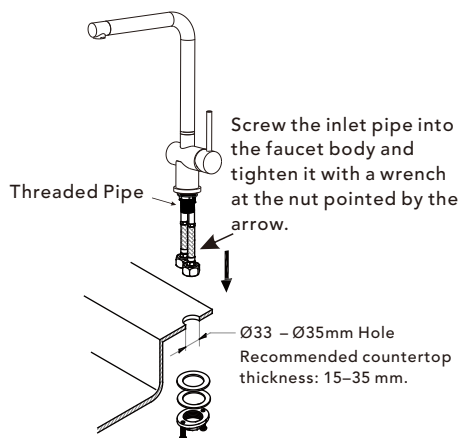


1. Remove tailpiece nut assembly from the Threaded Pipe. The countertop cutout dimensions are as shown in the diagram.

2

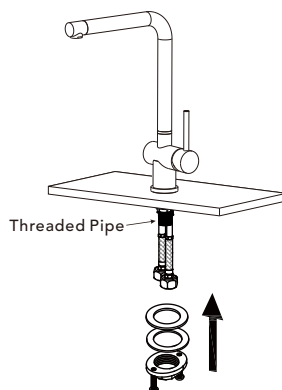


2. Insert faucet body into the hole on the counter top. Secure the tailpiece nut assembly onto the threaded pipe connection under the sink in order, and tighten using a screwdriver.

3

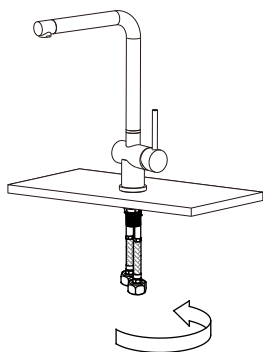

3. Adjust direction of faucet body.




4

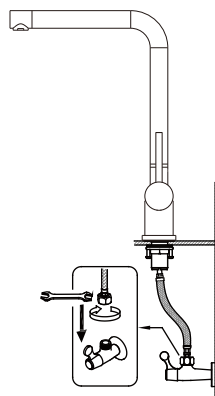

4. Connect hot and cold inlet hoses to the angle stops. Tighten with a wrench until snug. Turn on hot and cold angle stops and check for leaks.

◆ Instalación y Cuestiones de Mantenimiento

1. Compruebe la lista de accesorios para verificar que todas las piezas están completas en este paquete.
2. No desmonte el cuerpo principal por su cuenta.
3. Conecte las tuberías de entrada a las válvulas de suministro.
4. Asegúrese de que las tuberías de entrada y las válvulas de suministro no tengan impurezas y estén limpias, y de que no haya impurezas en la tubería.
5. Después de la instalación, compruebe que todas las uniones no presenten fugas.
6. No deje el grifo de cocina expuesto a un entorno severamente corrosivo.






Qué Sí Hacer

1. Para mantener brillante la superficie del grifo, límpielo regularmente.
2. Enjuague el grifo con agua limpia y séquelo con un paño de algodón suave.
3. Utilice uno de los siguientes limpiadores para eliminar la suciedad de la superficie:
 - a. Limpiador líquido suave.
 - b. Limpiador de vidrio incoloro y limpiador en polvo que no causen abrasión y se disuelvan completamente.
 - c. Líquido de pulido que no cause abrasión.


Qué No Hacer

1. Evite el uso de polvos de limpieza, productos químicos de limpieza agresivos, cepillos y trapos ásperos para evitar arañazos y rozaduras.
2. No utilice limpiadores ácidos para limpiar el grifo, ya que pueden causar corrosión en la superficie. Si el grifo entra en contacto con sustancias ácidas dañinas, enjuáguelo inmediatamente con agua.

Herramientas Necesarias:




♦ **Grifo de cocina de agua caliente y fría**
Lista de accesorios

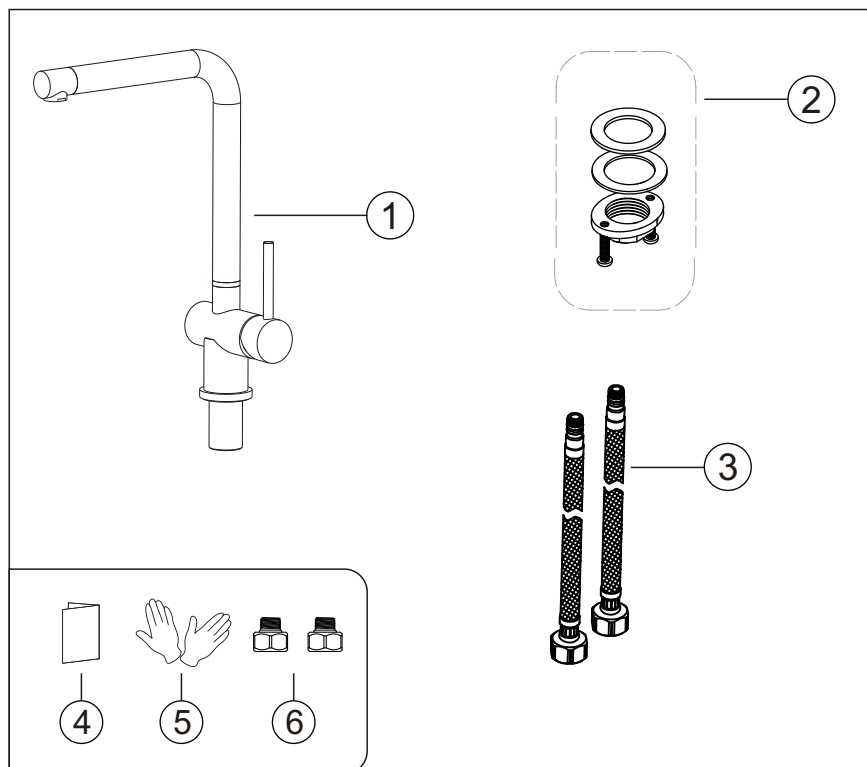

N.º	Nombre de la pieza	Cant.
1	Cuerpo del grifo	1
2	Ensamblaje de la tuerca del manguito	1 juego
3	Tuberías de entrada de agua caliente y fría	1 par
4	Manual de instalación	1
5	Guantes	1 par
6	Adaptador de manguera de G9/16 a G1/2	2


◆ Paso de instalación

1

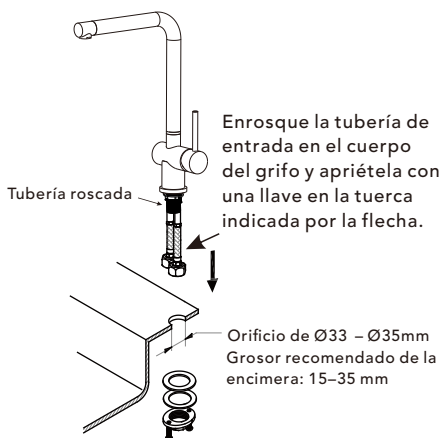


1. Retire el ensamblaje de la tuerca del tubo de desagüe de la tubería roscada. Las dimensiones del recorte en la encimera son las indicadas en el diagrama.

2

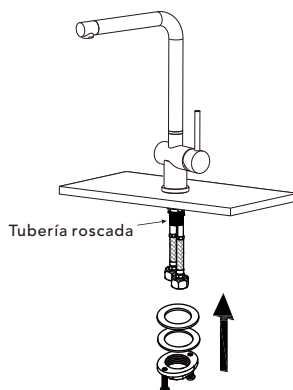


2. Inserte el cuerpo del grifo en el orificio de la encimera. Fije el ensamblaje de la tuerca del tubo de desagüe en la conexión de la tubería roscada debajo del fregadero en el orden correcto y apriételo con un destornillador.

3

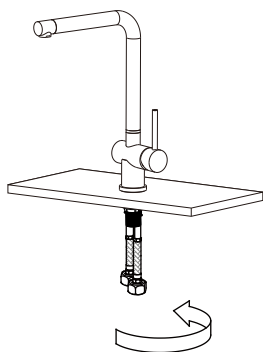

3. Ajuste la dirección del cuerpo del grifo.

4

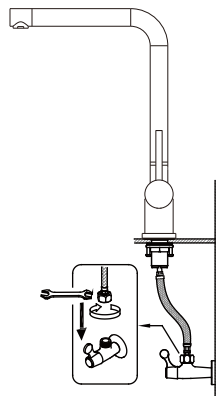

4. Conecte las mangueras de entrada de agua caliente y fría a las llaves de paso. Apriételas con una llave hasta que queden bien ajustadas. Abra las llaves de paso de agua caliente y fría y verifique si hay fugas.